

**SYLVANIA**



## Efficient decorative lighting at its best!

ToLEDo® GLS / Globe / Ball / Candle

Sylvania's ToLEDo® LED decorative lamps are a perfect alternative to the incandescent lamp. Compact, elegant and energy efficient, these exceptional value for money products deliver years of warm, soothing light at the flick of a switch and save up to 88% energy.

A frosted finish ensures a warm, diffused light emission at a very wide angle and equals the ambience created by incandescent lamps.

ToLEDo® LED lamps are the ideal choice for decorative applications such as wall lights, table lamps and covered fixtures.

Digital | Lighting | Solutions

## Features

- Compact and elegant design
- Wide range of lumen outputs, from 470lm to 2450lm
- Up to 87% energy saving compared to incandescent lamps
- Instant light at the flick of a switch
- Suitable for replacement of up 150W incandescent lamps
- Uniform light distribution
- Available in different colour temperatures - 2700K, 4000K and 6500K
- Good colour rendering (CRI 80)
- Perfect for hotels, restaurants, lobbies, corridors, stairwells, reception areas, high ceiling rooms
- Lower maintenance costs

## Product information

Code	Description	Voltage (V)	Power (W)	Luminous Flux (lm)	Efficiency	Colour Temp (K)	Base	Finish	Equivalent Wattage (W)	Life (h)	Dimmable (Y/N)	Energy Class	Packaging Qty
<b>ToLEDo® GLS Non-Dimmable</b>													
0030831	TLD GLS 470LM 827 B22 SL	220-240	4	470	118	2700	B22	Frosted	40	15,000	N	E	6
0030832	TLD GLS 470LM 827 E27 SL	220-240	4	470	118	2700	E27	Frosted	40	15,000	N	E	6
0030833	TLD GLS 470LM 840 E27 SL	220-240	4	470	118	4000	E27	Frosted	40	15,000	N	E	6
0030834	TLD GLS 470LM 865 E27 SL	220-240	4	470	118	6500	E27	Frosted	40	15,000	N	E	6
0030835	TLD GLS 806LM 827 B22 SL	220-240	7	806	115	2700	B22	Frosted	60	15,000	N	E	6
0030836	TLD GLS 806LM 827 B22 SL4	220-240	7	806	115	2700	B22	Frosted	60	12,000	N	E	6
0030837	TLD GLS 806LM 827 B22 SL10	220-240	7	806	115	2700	B22	Frosted	60	12,000	N	E	6
0030838	TLD GLS 806LM 827 E27 SL	220-240	7	806	115	2700	E27	Frosted	60	15,000	N	E	6
0030839	TLD GLS 806LM 827 E27 SL4	220-240	7	806	115	2700	E27	Frosted	60	12,000	N	E	6
0030840	TLD GLS 806LM 827 E27 SL10	220-240	7	806	115	2700	E27	Frosted	60	12,000	N	E	6
0030842	TLD GLS 806LM 840 B22 SL4	220-240	7	806	115	4000	E27	Frosted	60	12,000	N	E	6
0030843	TLD GLS 806LM 840 E27 SL	220-240	7	806	115	4000	E27	Frosted	60	15,000	N	E	6
0030844	TLD GLS 806LM 840 E27 SL4	220-240	7	806	115	4000	E27	Frosted	60	12,000	N	E	6
0030845	TLD GLS 806LM 840 E27 SL10	220-240	7	806	115	4000	E27	Frosted	60	12,000	N	E	6
0030847	TLD GLS 806LM 865 E27 SL	220-240	7	806	115	6500	E27	Frosted	60	15,000	N	E	6
0029588	ToLEDo GLS V7 1055LM 827 B22 SL	220-240	9.5	1055	117	2700	B22	Frosted	75	15,000	N	E	6
0029589	ToLEDo GLS V7 1055LM 827 E27 SL	220-240	9.5	1055	117	2700	E27	Frosted	75	15,000	N	E	6
0030991	ToLEDo GLS V7 1055LM 827 E27 SL4	220-240	9.5	1055	117	2700	E27	Frosted	75	12,000	N	E	6
0029590	ToLEDo GLS V7 1055LM 840 E27 SL	220-240	9.5	1055	117	4000	E27	Frosted	75	15,000	N	E	6
0030992	ToLEDo GLS V7 1055LM 840 E27 SL4	220-240	9.5	1055	117	4000	E27	Frosted	75	12,000	N	E	6
0029591	ToLEDo GLS V7 1055LM 865 E27 SL	220-240	9.5	1055	117	6500	E27	Frosted	75	15,000	N	E	6
0029640	ToLEDo GLS 1521LM 827 B22 SL4	220-240	13	1521	120	2700	B22	Frosted	100	12,000	N	E	6
0029593	ToLEDo GLS V7 1521LM 827 E27 SL	220-240	13	1521	120	2700	E27	Frosted	100	15,000	N	E	6
0029641	ToLEDo GLS 1521LM 827 E27 SL4	220-240	13	1521	120	2700	E27	Frosted	100	12,000	N	E	6
0029594	ToLEDo GLS V7 1521LM 840 E27 SL	220-240	13	1521	120	4000	E27	Frosted	100	15,000	N	E	6
0029595	ToLEDo GLS V7 1521LM 865 E27 SL	220-240	13	1521	120	6500	E27	Frosted	100	15,000	N	E	6
0030041	TLD GLS V9 1920LM 827 E27 SL	220-240	16	1920	120	2700	E27	Frosted	121	15,000	N	E	6
0030042	TLD GLS V9 1920LM 840 E27 SL	220-240	16	1920	120	4000	E27	Frosted	121	15,000	N	E	6
0030043	TLD GLS V9 1920LM 865 E27 SL	220-240	16	1920	120	6500	E27	Frosted	126	15,000	N	E	6
0030044	TLD GLS V9 2450LM 827 E27 SL	220-240	20	2450	123	2700	E27	Frosted	150	15,000	N	E	6
0030045	TLD GLS V9 2450LM 840 E27 SL	220-240	20	2450	123	4000	E27	Frosted	150	15,000	N	E	6
0030046	TLD GLS V9 2450LM 865 E27 SL	220-240	20	2450	123	6500	E27	Frosted	155	15,000	N	E	6

## Images



ToLEDo® GLS  
4W/7W


ToLEDo® GLS  
9.5W

ToLEDo® GLS  
13W

ToLEDo® GLS  
16W/20W

## Dimensions (mm)

<b>GLS 470lm/806lm</b>	<b>E27</b>	<b>B22</b>
<b>H</b>	107	105
<b>W</b>	60	60
<b>GLS 1055lm</b>	<b>E27</b>	<b>B22</b>
<b>H</b>	109	107
<b>W</b>	60	60
<b>GLS 1521lm</b>	<b>E27</b>	<b>B22</b>
<b>H</b>	120	118
<b>W</b>	60	60
<b>GLS 1920lm/2450lm</b>	<b>E27</b>	
<b>H</b>	128	
<b>W</b>	68	

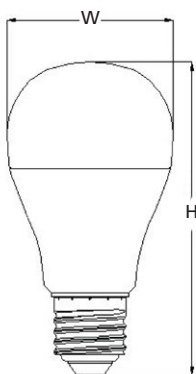

## Features


- Compact and elegant design
- Up to 86% energy saving compared to incandescent lamps
- Instant light at the flick of a switch
- Suitable for replacement of up 150W incandescent lamps
- Uniform light distribution
- Available in different colour temperatures - 2700K and 4000K
- Good colour rendering (CRI 80)
- Perfect for hotels, restaurants, lobbies, corridors, stairwells, reception areas, high ceiling rooms
- Lower maintenance costs

## Product information

Code	Description	Voltage (V)	Power (W)	Luminous Flux (lm)	Efficiency	Colour Temp (K)	Base	Finish	Equivalent Wattage (W)	Life (h)	Dimmable (Y/N)	Energy Class	Packaging Qty
<b>ToLEDo® Globe Non-Dimmable</b>													
0026902	ToLEDo G120 2450lm 827 E27 SL	220-240	20	2450	123	2700	E27	Frosted	150	15,000	N	E	6
0026903	ToLEDo G120 2450lm 840 E27 SL	220-240	20	2450	123	4000	E27	Frosted	150	15,000	N	E	6

## Dimensions (mm)

G120	E27
H	175
W	120

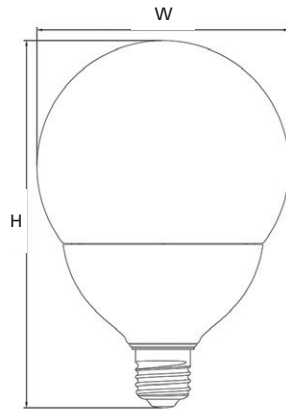

## Images



ToLEDo G120  
20W

## Features


- Elegant and compact design
- Up to 88% energy saving compared to incandescent lamps
- Instant light at the flick of a switch
- Suitable for replacement of up to 60W incandescent lamps
- Available in different colour temperatures - 2700K, 4000K and 6500K
- Good colour rendering (CRI 80)

## Product information

Code	Description	Voltage (V)	Power (W)	Luminous Flux (lm)	Efficiency	Colour Temp (K)	Base	Finish	Equivalent Wattage (W)	Life (h)	Dimmable (Y/N)	Energy Class	Packaging Qty
<b>ToLEDo® Ball Non-Dimmable</b>													
0030861	TLD BALL 250LM 827 E14 SL	220-240	2.2	250	114	2700	E14	Frosted	25	15,000	N	E	6
0030862	TLD BALL 250LM 827 E27 SL	220-240	2.2	250	114	2700	E27	Frosted	25	15,000	N	E	6
0030863	TLD BALL 470LM 827 E14 SL	220-240	4.2	470	112	2700	E14	Frosted	40	15,000	N	E	6
0030864	TLD BALL 470LM 827 E14 SL4	220-240	4.2	470	112	2700	E14	Frosted	40	12,000	N	E	6
0030865	TLD BALL 470LM 827 E27 SL	220-240	4.2	470	112	2700	E27	Frosted	40	15,000	N	E	6
0030866	TLD BALL 470LM 827 E27 SL4	220-240	4.2	470	112	2700	E27	Frosted	40	12,000	N	E	6
0030867	TLD BALL 470LM 840 E14 SL	220-240	4.2	470	112	4000	E14	Frosted	40	15,000	N	E	6
0030868	TLD BALL 470LM 840 E27 SL	220-240	4.2	470	112	4000	E27	Frosted	40	15,000	N	E	6
0030869	TLD BALL 470LM 865 E14 SL	220-240	4.2	470	112	6500	E14	Frosted	40	15,000	N	E	6
0030870	TLD BALL 470LM 865 E27 SL	220-240	4.2	470	112	6500	E27	Frosted	40	15,000	N	E	6
0029629	ToLEDo BALL V7 806LM 827 B22 SL	220-240	6.5	806	124	2700	B22	Frosted	60	15,000	N	E	6
0029630	ToLEDo BALL V7 806LM 827 E14 SL	220-240	6.5	806	124	2700	E14	Frosted	60	15,000	N	E	6
0029631	ToLEDo BALL V7 806LM 827 E27 SL	220-240	6.5	806	124	2700	E27	Frosted	60	15,000	N	E	6
0029632	ToLEDo BALL V7 806LM 840 E14 SL	220-240	6.5	806	124	4000	E14	Frosted	60	15,000	N	E	6
0029633	ToLEDo BALL V7 806LM 840 E27 SL	220-240	6.5	806	124	4000	E27	Frosted	60	15,000	N	E	6
0029634	ToLEDo BALL V7 806LM 865 E14 SL	220-240	6.5	806	124	6500	E14	Frosted	60	15,000	N	E	6
0029635	ToLEDo BALL V7 806LM 865 E27 SL	220-240	6.5	806	124	6500	E27	Frosted	60	15,000	N	E	6

## Dimensions (mm)

250lm / 470lm / 806lm	E14	E27	B22
<b>L</b>	82	77	75
<b>W</b>	45	45	45



## Images



## Features


- Elegant and compact design.
- Up to 88% energy saving compared to incandescent lamps
- Instant light at the flick of a switch
- Suitable for replacement of up to 60W incandescent lamps
- Available in different colour temperatures - 2700K, 4000K and 6500K
- Good colour rendering (CRI 80)
- Bent tip shape resembles a candle's flame - providing a classic look

## Product information

Code	Description	Voltage (V)	Power (W)	Luminous Flux (lm)	Efficiency	Colour Temp (K)	Base	Finish	Equivalent Wattage (W)	Life (h)	Dimmable (Y/N)	Energy Class	Packaging Qty
<b>ToLEDo® Candle Non-Dimmable</b>													
0030881	TLD CANDLE 250LM 827 E14 SL	220-240	2.2	250	114	2700	E14	Frosted	25	15,000	N	E	6
0030882	TLD CANDLE 250LM 840 E14 SL	220-240	2.2	250	114	4000	E14	Frosted	25	15,000	N	E	6
0030883	TLD CANDLE 250LM 865 E14 SL	220-240	2.2	250	114	6500	E14	Frosted	25	15,000	N	E	6
0030884	TLD CANDLE 470LM 827 E14 SL	220-240	4.2	470	112	2700	E14	Frosted	40	15,000	N	E	6
0030885	TLD CANDLE 470LM 827 E14 SL4	220-240	4.2	470	112	2700	E14	Frosted	40	12,000	N	E	6
0030886	TLD CANDLE 470LM 840 E14 SL	220-240	4.2	470	112	4000	E14	Frosted	40	15,000	N	E	6
0030887	TLD CANDLE 470LM 865 E14 SL	220-240	4.2	470	112	6500	E14	Frosted	40	15,000	N	E	6
0029612	ToLEDo CANDLE V7 806LM 827 B22 SL	220-240	6.5	806	124	2700	B22	Frosted	60	15,000	N	E	6
0029613	ToLEDo CANDLE V7 806LM 827 E14 SL	220-240	6.5	806	124	2700	E14	Frosted	60	15,000	N	E	6
0029614	ToLEDo CANDLE V7 806LM 827 E27 SL	220-240	6.5	806	124	2700	E27	Frosted	60	15,000	N	E	6
0029615	ToLEDo CANDLE V7 806LM 840 E14 SL	220-240	6.5	806	124	4000	E14	Frosted	60	15,000	N	E	6
0029616	ToLEDo CANDLE V7 806LM 865 E14 SL	220-240	6.5	806	124	6500	E14	Frosted	60	15,000	N	E	6

## Dimensions (mm)

Candle			
250lm / 470lm / 806lm	E14	E27	B22
L	103	105	103
W	35	35	35



## Images



ToLEDo®



# SYLVANIA



CE UK  
CA



Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Current details should therefore be checked with Feilo Sylvania International Group Kft.

Copyright Feilo Sylvania International Group Kft. June 2025

[sylvania-group.com](http://sylvania-group.com)

A Feilo Sylvania Company